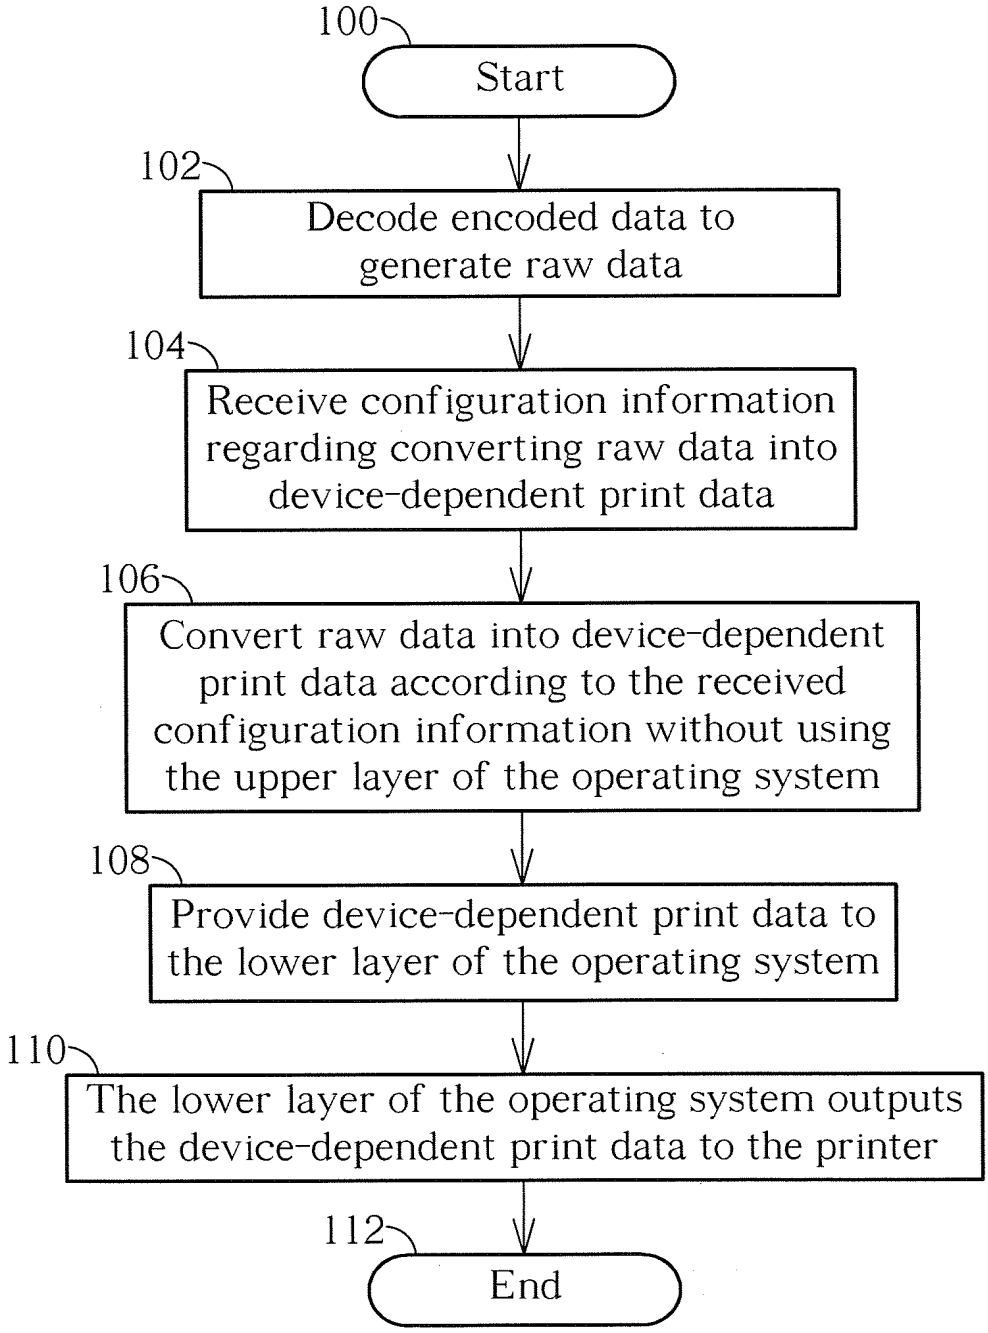
100
Start
102
Decode encoded data to generate raw data
104
Receive configuration information regarding converting raw data into device-dependent print data
106
Convert raw data into device-dependent print data according to the received configuration information without using the upper layer of the operating system
108
Provide device-dependent print data to the lower layer of the operating system
110
The lower layer of the operating system outputs the device-dependent print data to the printer
112
End

Fig. 3